
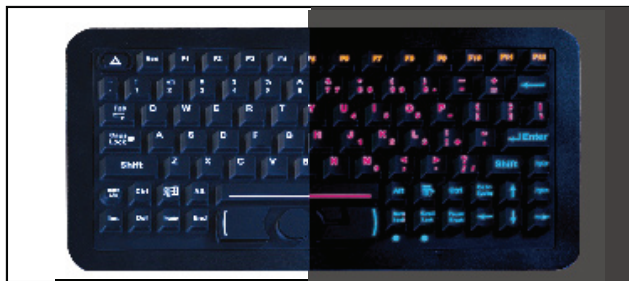


Industrial Keyboard Series

Industrial Keyboard Series						
						
Model Name	KM-086G	KM-088G	KM-088A-RS	MK-KTP5A	KBD-ACK-540	MK-KD1
Key Number	86-key	88-key	88-key	105-key	88/89 key	Standard 19" 1U height drawer With keylock and handle, compatible with KBD-ACK-540
Mouse	Pointing Device	Touch Pad	Pointing Device	Touch Pad	Touch Pad	
Connector	PS/2 type 6-pin mini-DIN	PS/2 type 6-pin mini-DIN	PS/2 type 6-pin mini-DIN	2x PS/2 for KB/MS	2x PS/2 for KB/MS	
LED backlight	Available Four levels					
Color	Black	Black	Black	White	White	
Water-Proof	IP-65	NA	IP-55	NA	NA	
Dimension	D304 x W169 x H38	D406.8 x W185 x H15	D370 x W139 x H16	D485 x W380 x H44	D289 x W227 x H27	D482.6 x W360 x H44

KM-086G



Daylight

Darkness

Main Features

- RoHS compliant.
- Waterproof and dust proof industrial silicone rubber
- LED backlight with four levels of backlighting
- Rugged computer pointing device (mouse)
- Standard PS/2 type keyboard and mouse connectors
- Easy access to the operating system with Microsoft Window keys

IEI's water-proof IP-65 industrial keyboard provides perfect options for portable and compact applications.

The KM-086G offers both a rugged keyboard and rugged computer pointing device (mouse) in one compact package.

It boasts a completely sealed and ruggedized construction that allows it to be protected from water and dust, meeting IP-65 specifications.


The KM-086G's backlighting is available with yellow or red blue and orange LEDs and four levels of backlighting.



IP-65 Certificate

86-key Water-Proof Industrial Keyboard with Pointing Device (Mouse)


RoHS	RoHS compliant
Material	Industrial silicon rubber keyboard / pointing device (mouse) and plastic case
Connector	Standard PS/2 type 6-pin mini-DIN connector
Relative Humidity	0%~85%, non-condensing
Colors	Black
Dimensions (mm)	D304 x W169 x H38

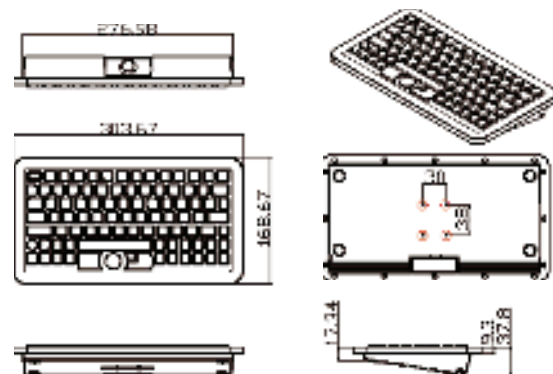

Ordering Information

Part No.	Description
KM-086G-US	86key Water-Proof Keyboard with Pointing Device for English language; RoHS

KM-088G

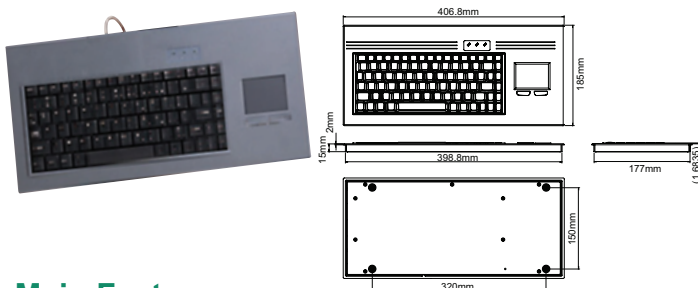

Main Feature

- Standard English language keyboard layout
- Optional Japanese, German, French and Italian keyboard layout

88-key and Touch Pad Module

RoHS	RoHS compliant
keyboard	88-keys keyboard
Connector	Standard PS/2 type 6-pin Mini-DIN cable
Operation Temp.	0~50°C
Colors	Black
Dimensions (mm)	D406.8 x W185 x H15

Ordering Information

Part No.	Description
KM-088G - L	L : Language Code EN: English JP: Japanese DE: German FR: French IT:Italian CH:Chinese/English

Industrial Keyboard Series

KM-088A-RS



Main Feature

- IP55 Compliant dirt-,dust- and water-resistance
- Compact design with super low profile for easy fitting into 1U Rackmount
- Specifically designed for IPC, Military ,Medical and other Applications

MK-KTP5A



KBD-ACK-540



MK-KD1



MK-KD1

MK-KD1 +
KBD-ACK-540

88-key IP55 Waterproof Keyboard with Point Device

RoHS	RoHS compliant
keyboard	88-keys, keyboard compatible to IBM PC/AT
Connector	Standard PS/2 type 6-pin Mini-DIN adapter
Operation Temp.	0~50°C
Colors	Black
Dimensions (mm)	D139 x W370 x H16
MTBF	8 million life cycle times

Ordering Information

Part No.	Description
KM-088A-RS	88 Keys IP55 Waterproof Keyboard with Point Device ;RoHS. Notes: For other language K/B, please contact region sales.

1U Rackmount keyboard & TouchPad Drawer

Compatible	105 key,compatible with IBM PC/AT ,PS2 keyboard
Touch pad	Compatible with serial and PS/2 mouse
Colors	White
Operation Temperature	0~55°C
Dimensions (D x W x H)	485 mm x 380 mm x 44 mm
N.W./G.W.	5 kg / 6 kg

Ordering Information

Part No.	Description
MK-KTP5A-RS:	1U Rackmount Keyboard/Touchpad Drawer;RoHS

Mini 88/89 key PS/2 keyboard with touchpad

Description	Mini 88/89 key PS/2 keyboard integrated Touch-Pad
Compatible	88 key,compatible with IBM PC/AT ,PS2 keyboard
Colors	White
Operation Temperature	0~55°C
Dimensions (D x W x H)	289 mm x 227 mm x 27 mm
N.W./G.W.	0.75 kg / 1 kg
MTBF	5 million life cycles times

Ordering Information

Part No.	Description
KBD-ACK-540- [L] -RS:	Mini 88/89 key PS/2 Keyboard;RoHS [L] : Language Code: EN:English .For other languages ,please contact supplier

1U Rackmount Drawer

Description	Standard 19" 1U height drawer
Feature	With keylock and hidden handle, compatible with KBD-ACK-540
Colors	Black or White
Dimensions (D x W x H)	360 mm x 482.6 mm x 44 mm
N.W./G.W.	1.4 kg / 2 kg

Ordering Information

Part No.	Description
MK-KD1- [C] -RS:	1U Rackmount Drawer;RoHS [C] :Color Code:B=Black W=White

1

Industrial
Computing
Solutions

2

Embedded
Computing
Solutions

3

Industrial Data
Collector
and Controller

4

Video
Capture
Solutions

5

I/O
Communication
Solutions

6

Panel
Solutions

7

ORing
Network
Communication

8

Power Supply/
Peripherals